




GANCUBE

Skewb Instructions



Follow GANCUBE on Instagram
for more speedcubing info

GAN Skewb uses GAN Dual Precision System (GES Pro), which enable separate control and adjustment of center travel and tension. Adjust center travel by the center numerical distancing nut with bare hands, and tension by adjusting the tension nut.

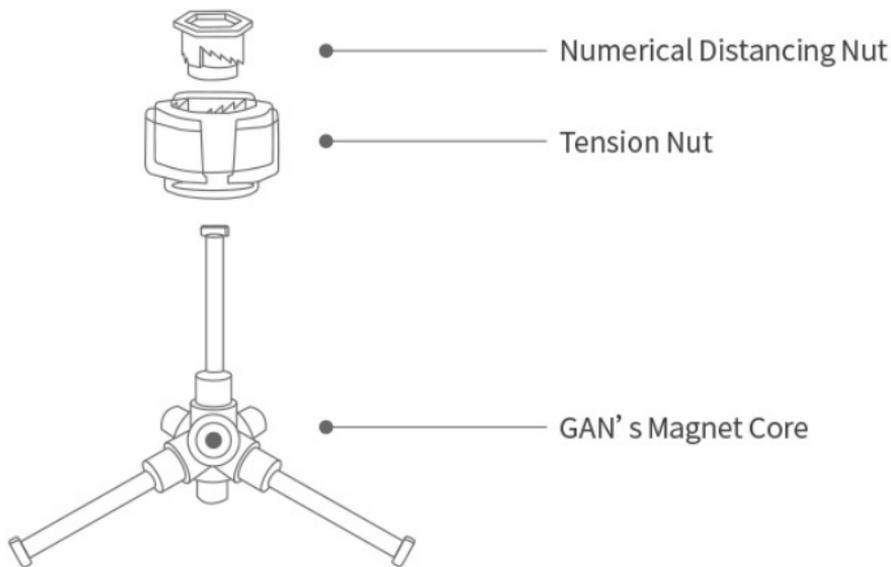

Center Travel: GES PRO-Numerical Distancing Nut

2 sets of Numerical Distancing Nuts enabling 4 settings of Center Travel


∅ : in and out position. Only when the pointer is resting here can you take out or put in a tension nut.
1/2/3/4 : 4 different axis distances.




Light Blue
(pre-installed)




Dark Blue

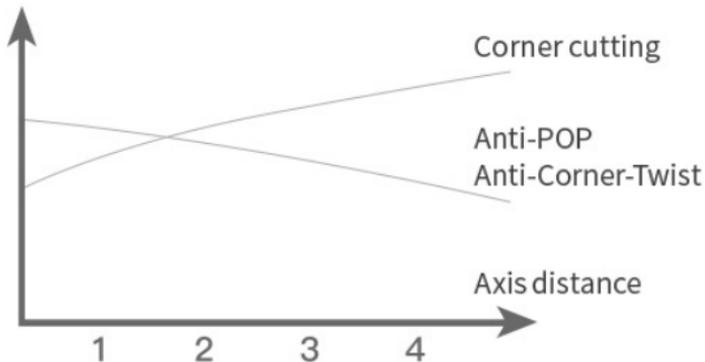

Tension: GES PRO-Tension Nut

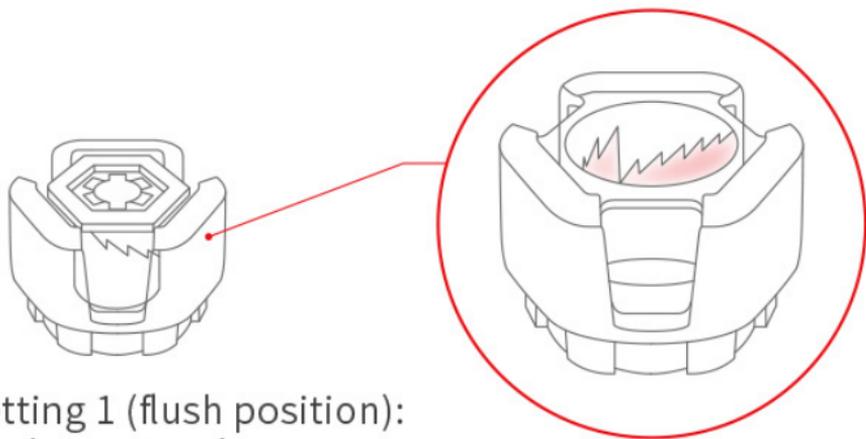


Setting 1 (flush position):
minimum tension

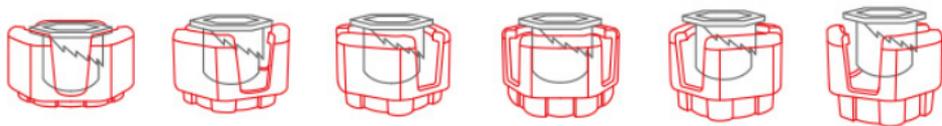

Each turn counter-clockwise increases the tension by one grade.

Set up steps


Only 4 corner pieces have grooves for adjustment.

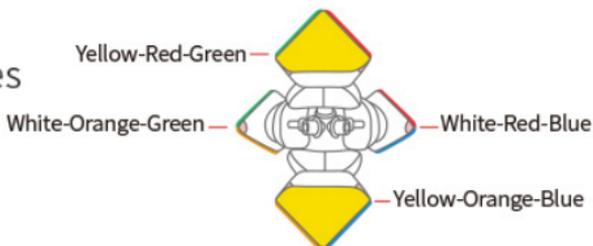

Step 1: Center Travel Adjustment (no tool needed)

1 Changing settings

Open the corner piece from one of the easy-opening groove. Push the distancing nut down and twist it, until the desired number lines up with the anchor at the tip of the core, release so the anchor locks up the nut.

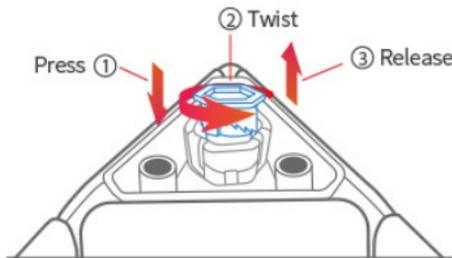

2 Swapping the nut

Push the nut down and twist it until the \emptyset point lines with the anchor, release and the nut unlocks and can be removed.

Step 2: Tension Adjustment

Insert the tool into the GES nut from the 3 matching slots. Then turn counter-clockwise to increase the tension. You will feel and hear a click with every turn as the nut moves downward.

